

Technical Accessory Guides (TAGs)

For Associates, Resellers, ISVs and Alliance Partners

Global



Version: Active-Only

Will only show products that are known to be available for sale

Need to provide an update or change?

Contact <mailto:pgw786@zebra.com>



For Internal Use by
PartnerConnect Members Only



WS50 Series Technical Accessory Guide



NOTE: This document is only for general reference. Solutions Pathway and related PMBs should be used for product availability, pricing, and final solution selection.

* Zebra does not endorse or specifically recommend any **third-party products, accessories, or hardware**. ZEBRA DISCLAIMS ANY AND ALL LIABILITY, INCLUDING ANY EXPRESS OR IMPLIED WARRANTIES, WHETHER ORAL OR WRITTEN, FOR SUCH THIRD PARTY PRODUCTS, ACCESSORIES, OR HARDWARE. THE CUSTOMER ACKNOWLEDGES THAT NO REPRESENTATION HAS BEEN MADE BY ZEBRA AS TO THE FITNESS OF THE THIRD-PARTY PRODUCTS, ACCESSORIES, OR HARDWARE FOR THE CUSTOMER'S INTENDED PURPOSE.

Cradles/Charging


Dual Device Cradles

Part Number	Picture	Description	Notes	Required Items
CRD-WS5X-2SCV-01		Dual Slot Charge-Only Cradle - Converged	<ul style="list-style-type: none"> ▶ Charges up to two WS50 Converged configuration devices. ▶ Device with Finger mount can be dropped directly into cradle. If using Back of Hand mount the soft good must be removed before inserting into cradle. ▶ Cradle includes Converged shims (black color). Can be converted to accommodate Wrist config device by substituting with gray color shims (ordered separately). 	<ul style="list-style-type: none"> ▶ Power Supply (PWR-BGA12V50W0WW) ▶ DC Line Cord (CBL-DC-388A1-01) ▶ AC Line Cord (23844-00-00P or country specific version)
CRD-WS5X-2SWR-01		Dual Slot Charge-Only Cradle - Wrist	<ul style="list-style-type: none"> ▶ Charges up to two WS50 Wrist configuration devices. ▶ Cradle includes Wrist shims (gray color). Can be converted to accommodate Converged config device by substituting with black color shims (ordered separately). 	<ul style="list-style-type: none"> ▶ Power Supply (PWR-BGA12V50W0WW) ▶ DC Line Cord (CBL-DC-388A1-01) ▶ AC Line Cord (23844-00-00P or country specific version)
CRD-WS5X-2SRD-01		Dual Slot Charge-Only Cradle - RFID	<ul style="list-style-type: none"> ▶ Charges up to two WS50 RFID configuration devices. ▶ Cradle includes RFID shims (gray color). Can be converted to accommodate Converged or Wrist config devices by substituting with appropriate color shims (ordered separately). 	<ul style="list-style-type: none"> ▶ Power Supply (PWR-BGA12V50W0WW) ▶ DC Line Cord (CBL-DC-388A1-01) ▶ AC Line Cord (23844-00-00P or country specific version)

Multi-Device Cradles

Part Number	Picture	Description	Notes	Required Items
-------------	---------	-------------	-------	----------------

CRD-WS5X-10SCV-01		10-Slot Charge-Only Cradle - Converged	<ul style="list-style-type: none"> ▶ Charges up to ten WS50 Converged configuration devices. ▶ Cradle includes Converged shims (black color). Can be converted to accommodate Wrist config device by substituting with gray color shims (ordered separately). ▶ LED on the face of WS50 indicates charge status. 	<ul style="list-style-type: none"> ▶ DC Line Cord (CBL-DC-381A1-01) ▶ Power Supply (PWR-BGA12V108W0WW) ▶ AC Line Cord (23844-00-00F or country specific version)
CRD-WS5X-10SWR-01		10-Slot Charge-Only Cradle - Wrist	<ul style="list-style-type: none"> ▶ Charges up to ten WS50 Wrist configuration devices. ▶ Cradle includes Wrist shims (gray color). Can be converted to accommodate Converged config device by substituting with black color shims (ordered separately). ▶ LED on the face of WS50 indicates charge status. 	<ul style="list-style-type: none"> ▶ DC Line Cord (CBL-DC-381A1-01) ▶ Power Supply (PWR-BGA12V108W0WW) ▶ AC Line Cord (23844-00-00F or country specific version)
CRD-WS5X-10SRD-01		10-Slot Charge-Only Cradle - RFID	<ul style="list-style-type: none"> ▶ Charges up to ten WS50 RFID configuration devices. ▶ Cradle includes RFID shims (gray color). Can be converted to accommodate Converged or Wrist config devices by substituting with appropriate color shims (ordered separately). ▶ LED on the face of WS50 indicates charge status. 	<ul style="list-style-type: none"> ▶ DC Line Cord (CBL-DC-381A1-01) ▶ Power Supply (PWR-BGA12V108W0WW) ▶ AC Line Cord (23844-00-00F or country specific version)
CRD-WS5X-5SECV-01		5-Slot Ethernet + Charge Cradle with Spare Battery Charging - Converged	<ul style="list-style-type: none"> ▶ Allows Ethernet speeds up to 1 Gb ▶ Charges up to five WS50 Converged configuration units and five spare batteries ▶ Can also be wall or rack mounted using Mounting Bracket (BRKT-SCRD-SMRK-01) ▶ Cradle includes Converged shims (black color). Can be converted to accommodate Wrist config device by substituting with gray color shims (ordered separately). ▶ LED on the face of WS50 indicates charge status. 	<ul style="list-style-type: none"> ▶ DC Line Cord (CBL-DC-381A1-01) ▶ Power Supply (PWR-BGA12V108W0WW) ▶ AC Line Cord (23844-00-00F or country specific version)
CRD-WS5X-5SEWR-01		5-Slot Ethernet + Charge Cradle with Spare Battery Charging - Wrist	<ul style="list-style-type: none"> ▶ Allows Ethernet speeds up to 1 Gb ▶ Charges up to five WS50 Wrist configuration units and five spare batteries ▶ Can also be wall or rack mounted using Mounting Bracket (BRKT-SCRD-SMRK-01) ▶ Cradle includes Wrist shims (gray color). Can be converted to accommodate Converged config device by substituting with black color shims (ordered separately). ▶ LED on the face of WS50 indicates charge status. 	<ul style="list-style-type: none"> ▶ DC Line Cord (CBL-DC-381A1-01) ▶ Power Supply (PWR-BGA12V108W0WW) ▶ AC Line Cord (23844-00-00F or country specific version)

CRD-WS5X-5SERD-01		5-Slot Ethernet + Charge Cradle with Spare Battery Charging - RFID	<ul style="list-style-type: none"> ▶ Allows Ethernet speeds up to 1 Gb ▶ Charges up to five WS50 RFID configuration units and five spare batteries ▶ Can also be wall or rack mounted using Mounting Bracket (BRKT-SCRD-SMRK-01) ▶ Cradle includes RFID shims (gray color). Can be converted to accommodate Converged or Wrist config devices by substituting with appropriate color shims (ordered separately). ▶ LED on the face of WS50 indicates charge status. 	<ul style="list-style-type: none"> ▶ DC Line Cord (CBL-DC-381A1-01) ▶ Power Supply (PWR-BGA12V108W0WW) ▶ AC Line Cord (23844-00-00F or country specific version)
BRKT-SCRD-SMRK-01		Multi-Slot Wall/Rack Mount Bracket	<ul style="list-style-type: none"> ▶ Allows for rack and wall mounting of one 5-Slot, 10-Slot, or 20-Slot Charger. Also can be used to mount up to four Single Slot Cradles or 4-Slot Battery Chargers ▶ Bracket can be mounted on standard 19" network rack or on a wall. ▶ Cable routing slots & removable power supply holder tray. ▶ Adjustable tabs & screw mounts for easy hanging/installation. ▶ Adjustable orientations - horizontal, vertical, angled. ▶ See the Bluetooth-Generic Accessories TAG for info on 3rd party Network Racks that can be used for mounting this bracket. 	
ADP-TC7X-PLT-FX		5-Slot ShareCradle Mounting Bracket Adapter Plate for Honeywell	<ul style="list-style-type: none"> ▶ Allows Zebra Multi-Slot ShareCradles to be mounted on legacy Honeywell Flex Cradle Wall Mount Brackets (HON SKU #203-641-002). ▶ Includes hardware to attach plate to HON wall bracket and secure ShareCradle to plate. ▶ NOTE: This is a custom product. Please work with your Zebra representative to open a Custom Product Request (CPR) if you would like to order this item. 	
Cradle Accessories				
Part Number	Picture	Description	Notes	Required Items
SHIM-CRD-WS5XC-01		Replacement Cradle Shims - Converged (pack of 10)	<ul style="list-style-type: none"> ▶ Shim is used with Dual Slot and Multi-Slot Cradles allowing a Converged configuration device to be used with cradle. ▶ Shims can be ordered to replace damaged shims or to replace Wrist configuration shims allowing a single cradle to accommodate a mixture of Wrist and Converged configuration devices. ▶ Shim is black color. 	

SHIM-CRD-WS5XW-01		Replacement Cradle Shims - Wrist (pack of 10)	<ul style="list-style-type: none"> ▶ Shim is used with Dual Slot and Multi-Slot Cradles allowing a Wrist configuration device to be used with cradle. ▶ Shims can be ordered to replace damaged shims or to replace Converged configuration shims allowing a single cradle to accommodate a mixture of Wrist and Converged configuration devices. ▶ Shim is gray color. 	
Battery Charging				
Part Number	Picture	Description	Notes	Required Items
SAC-WS5X-4S13-01		4-Slot Battery Charger - Converged	<ul style="list-style-type: none"> ▶ Charges up to 4 Spare Batteries for Converged configuration devices (1300mAh battery) ▶ Up to 4 Battery Chargers can be wall or rack mounted using Mounting Bracket (BRKT-SCRD-SMRK-01) Black ▶ Charger includes Converged shims (black color). Can be converted to accommodate Wrist config batteries by substituting with gray color shims (ordered separately). 	<ul style="list-style-type: none"> ▶ Power Supply (PWR-BGA12V50W0WWW) ▶ DC Line Cord (CBL-DC-388A1-01) ▶ AC Line Cord (23844-00-00F or country specific version)
SAC-WS5X-4S8-01		4-Slot Battery Charger - Wrist	<ul style="list-style-type: none"> ▶ Charges up to 4 Spare Batteries for Wrist configuration devices (800mAh battery) ▶ Up to 4 Battery Chargers can be wall or rack mounted using Mounting Bracket (BRKT-SCRD-SMRK-01) Gray ▶ Charger includes Wrist shims (gray color). Can be converted to accommodate Converged config batteries by substituting with black color shims (ordered separately). 	<ul style="list-style-type: none"> ▶ Power Supply (PWR-BGA12V50W0WWW) ▶ DC Line Cord (CBL-DC-388A1-01) ▶ AC Line Cord (23844-00-00F or country specific version)
SAC-WS5X-4S24-01		4-Slot Battery Charger - RFID	<ul style="list-style-type: none"> ▶ Charges up to 4 Spare Batteries for RFID configuration devices (2400mAh battery) ▶ Up to 4 Battery Chargers can be wall or rack mounted using Mounting Bracket (BRKT-SCRD-SMRK-01) Gray ▶ Charger includes RFID shims (gray color). Can be converted to accommodate Converged or Wrist config batteries by substituting with appropriate color shims (ordered separately). 	<ul style="list-style-type: none"> ▶ Power Supply (PWR-BGA12V50W0WWW) ▶ DC Line Cord (CBL-DC-388A1-01) ▶ AC Line Cord (23844-00-00F or country specific version)
SAC-WS5X-20S13-01		20-Slot Battery Charger - Converged	<ul style="list-style-type: none"> ▶ Charges up to 20 Spare batteries for Converged configuration devices (1300mAh battery) ▶ Can be wall or rack mounted using Mounting Bracket (BRKT-SCRD-SMRK-01) ▶ Charger includes Converged shims (black color). Can be converted to accommodate Wrist config batteries by substituting with gray color shims (ordered separately). 	<ul style="list-style-type: none"> ▶ DC Line Cord (CBL-DC-381A1-01) ▶ Power Supply (PWR-BGA12V108W0WWW) ▶ AC Line Cord (23844-00-00F or country specific version)

SAC-WS5X-20S8-01		20-Slot Battery Charger - Wrist	<ul style="list-style-type: none"> ▶ Charges up to 20 Spare batteries for Wrist configuration devices (800mAh battery) ▶ Can be wall or rack mounted using Mounting Bracket (BRKT-SCRD-SMRK-01) ▶ Charger includes Wrist shims (gray color). Can be converted to accommodate Converged config batteries by substituting with black color shims (ordered separately). 	<ul style="list-style-type: none"> ▶ DC Line Cord (CBL-DC-381A1-01) ▶ Power Supply (PWR-BGA12V108W0WW) ▶ AC Line Cord (23844-00-00F or country specific version)
SAC-WS5X-20S24-01		20-Slot Battery Charger - RFID	<ul style="list-style-type: none"> ▶ Charges up to 20 Spare batteries for RFID configuration devices (2400mAh battery) ▶ Can be wall or rack mounted using Mounting Bracket (BRKT-SCRD-SMRK-01) ▶ Charger includes RFID shims (gray color). Can be converted to accommodate Converged or Wrist config batteries by substituting with appropriate color shims (ordered separately). 	<ul style="list-style-type: none"> ▶ DC Line Cord (CBL-DC-381A1-01) ▶ Power Supply (PWR-BGA12V108W0WW) ▶ AC Line Cord (23844-00-00F or country specific version)
SHIM-SAC-WS5X13-01		Replacement Battery Charger Shims - Converged (pack of 20)	<ul style="list-style-type: none"> ▶ Shim is used with 4-Slot and 20-Slot Battery Chargers allowing a Converged configuration battery to be inserted into charger. ▶ Shims can be ordered to replace damaged shims or to replace Wrist configuration shims allowing a single Battery Charger to accommodate a mixture of Wrist and Converged configuration batteries. ▶ Shim is black color. 	
SHIM-SAC-WS5X8-01		Replacement Battery Charger Shims - Wrist (pack of 20)	<ul style="list-style-type: none"> ▶ Shim is used with 4-Slot and 20-Slot Battery Chargers allowing a Wrist configuration battery to be inserted into charger. ▶ Shims can be ordered to replace damaged shims or to replace Converged configuration shims allowing a single Battery Charger to accommodate a mixture of Wrist and Converged configuration batteries. ▶ Shim is gray color. 	

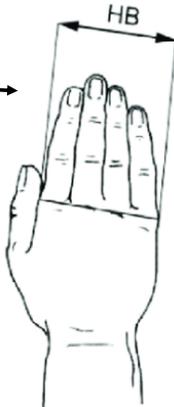
Communication Cables and Options

Part Number	Picture	Description	Notes	Required Items
-------------	---------	-------------	-------	----------------

<p>CBL-WS5X-USB1-02</p>		<p>Snap-on USB/Charge Cable, micro-USB</p> 	<ul style="list-style-type: none"> ▶ Allows WS50 to be charged and also provides USB host and client communications. ▶ Cable has a 6" (15 cm) pigtail cable with micro-USB female port. 	<ul style="list-style-type: none"> ▶ micro-USB cable (25-MCXUSB-01R or 25-124330-01R) ▶ optional USB charger... order Country Specific version of USB Power Supply (PWR-WUA5V12W0xx)
<p>CBL-WS5X-USB1-01</p>		<p>Snap-on USB/Charge Cable, USB-C</p> 	<ul style="list-style-type: none"> ▶ Allows WS50 to be charged and also provides USB host and client communications. ▶ Cable has a 6" (15 cm) pigtail cable with USB-C female port. 	<ul style="list-style-type: none"> ▶ USB-C cable (CBL-TC5X-USBC2A-01 or similar 3rd party USB-C standard cable) ▶ optional USB charger... order Country Specific version of USB Power Supply (PWR-WUA5V12W0xx)
<p>25-MCXUSB-01R</p>		<p>Micro USB Cable</p>	<ul style="list-style-type: none"> ▶ USB-A to micro-USB cable ▶ Attaches to micro-USB port on the WS50 Snap-on USB/Charge Cable (CBL-WS5X-USB1-02). ▶ Cable length is 60 in (1.5 m) 	<p>For use with WS50 Snap-on USB/Charge Cable (CBL-WS5X-USB1-02):</p> <ul style="list-style-type: none"> ▶ USB Power Adapter (PWR-WUA5V12W0US - or country specific version)

25-124330-01R		micro-USB cable for Charging/Communication	<ul style="list-style-type: none"> ▶ USB-A to micro-USB cable ▶ Attaches to micro-USB port on the WS50 Snap-on USB/Charge Cable (CBL-WS5X-USB1-02). ▶ Cable length is 48 in (1.2 m) 	<p>For use with WS50 Snap-on USB/Charge Cable (CBL-WS5X-USB1-02):</p> <ul style="list-style-type: none"> ▶ USB Power Adapter (PWR-WUA5V12W0US - or country specific version)
CBL-TC5X-USBC2A-01		USB-C cable for Charging/Communication	<ul style="list-style-type: none"> ▶ USB-A to USB-C cable ▶ Attaches to USB-C port on the WS50 Snap-on USB/Charge Cable (CBL-WS5X-USB1-01). ▶ Cable length is 39 in (1 m) 	<p>For use with WS50 Snap-on USB/Charge Cable (CBL-WS5X-USB1-01):</p> <ul style="list-style-type: none"> ▶ USB Power Adapter (PWR-WUA5V12W0US - or country specific version)
CBL-TC2Y-USBC90A-01		USB-C cable with right angle connector for Charging/Communication	<ul style="list-style-type: none"> ▶ USB-A to USB-C cable ▶ USB-A connector end has a 90° bend allowing cable to be used in tighter locations. ▶ Attaches to USB-C port on the WS50 Snap-on USB/Charge Cable (CBL-WS5X-USB1-01). ▶ Cable length is 45 in (1.1 m) 	<p>For use with WS50 Snap-on USB/Charge Cable (CBL-WS5X-USB1-01):</p> <ul style="list-style-type: none"> ▶ USB Power Adapter (PWR-WUA5V12W0US - or country specific version)
3rd party *		USB-C cable for Charging/Communication	<ul style="list-style-type: none"> ▶ Attaches to USB-C port on the WS50 Snap-on USB/Charge Cable (CBL-WS5X-USB1-01). 	<p>For use with WS50 Snap-on USB/Charge Cable (CBL-WS5X-USB1-01):</p> <ul style="list-style-type: none"> ▶ USB Power Adapter (PWR-WUA5V12W0US - or country specific version)
PSA1uB1E-E (3rd party) * http://www.portsmith.com		Portsmith Rugged Micro-B USB to Ethernet Adapter	<ul style="list-style-type: none"> ▶ 10/100 Mbps Ethernet with RJ45 Connection ▶ USB Port Micro-B wired OTG Host ▶ 100mA power draw ▶ Connects to WS50's Snap-on USB/Charge Cable with micro-USB connector ▶ No additional drivers required ▶ Ideal for customers that may have one time per device Ethernet requirements (i.e. installing WiFi certificates on device, staging, etc.) 	<ul style="list-style-type: none"> ▶ Snap-on USB/Charge Cable micro-USB (CBL-WS5X-USB1-02)
Soft Goods - Converged - Finger Mount Configuration 				
Part Number	Picture	Description	Notes	Required Items

SG-WS5X-SHLCS-01		Replacement Shell - Converged	<ul style="list-style-type: none"> ▶ This Shell is included on all Finger Mount or Back of Hand Mount configurations. ▶ Has 2 side input buttons 	
SG-WS5X-DFLTC-01		Replacement Deflector - Converged	<ul style="list-style-type: none"> ▶ This Deflector is included on all Finger Mount or Back of Hand Mount configurations. ▶ Includes two screws which attach Deflector to Shell. 	
SG-WS5X-TRGA-01		Replacement Finger Trigger - Converged & RFID	<ul style="list-style-type: none"> ▶ Used for replacement of Finger Trigger assembly or converting a Back of the Hand mount configuration to Finger mount configuration. ▶ Trigger can be rotated for use on right or left hand. ▶ Trigger also includes: <ul style="list-style-type: none"> - Comfort Pad (SG-WS5X-CMPDC-01) - Finger Strap (SG-WS5X-STRP-10 - QTY 1) - stop screw which can be optionally used to prevent removal or rotation of the trigger. 	
SG-WS5X-CMPDC-01		Replacement Comfort Pad for Converged Finger Trigger	<ul style="list-style-type: none"> ▶ Used to replace Comfort Pad on Converged and RFID configuration units. ▶ This pad is included on the Finger Trigger (SG-WS5-TRGA-01). 	
SG-WS5X-STRP-10		Replacement Finger Straps - Converged & RFID (pack of 10)	<ul style="list-style-type: none"> ▶ Used to replace Finger Strap on Converged and RFID configuration units. ▶ This strap is included on the Finger Trigger (SG-WS5-TRGA-01) ▶ Does not include rubber finger perch/bumper used on the Finger Trigger. 	
Soft Goods - Converged - Back of Hand Mount Configuration 				
Part Number	Picture	Description	Notes	Required Items

<p>SG-WS5X-SHLCS-01</p>		<p>Replacement Shell - Converged</p>	<ul style="list-style-type: none"> ▶ This Shell is included on all Finger Mount or Back of Hand Mount configurations. ▶ Has 2 side input buttons 									
<p>SG-WS5X-DFLTC-01</p>		<p>Replacement Deflector - Converged</p>	<ul style="list-style-type: none"> ▶ This Deflector is included on all Finger Mount or Back of Hand Mount configurations. ▶ Includes two screws which attach Deflector to Shell. 									
<p>SG-WS5X-BHMT-01</p>		<p>Replacement Back of Hand Mount Adapter - Converged</p>	<ul style="list-style-type: none"> ▶ This adapter is included with all Back of Hand Mount configurations. ▶ Adapter allows WS5X to be worn on the back of hand ▶ Does not include Hand Wrap 	<p>▶ Back of Hand Wrap (SG-WEAR-HNWPxx-01)</p>								
<p>Right Hand wrap SG-WEAR-HNWPRS-01 (Small size) SG-WEAR-HNWPRM-01 (Medium size) SG-WEAR-HNWPRL-01 (Large size)</p> <p>Left Hand wrap SG-WEAR-HNWPLS-01 (Small size) SG-WEAR-HNWPLM-01 (Medium size) SG-WEAR-HNWPLL-01 (Large size)</p>		<p>Hand Wrap for Back of Hand Mount Adapter</p>	<ul style="list-style-type: none"> ▶ Fabric hand wrap. ▶ Color of stitching on Hand Wrap indicates size: White = Small Black = Medium Blue = Large ▶ For suggested sizing measure user's Hand Breadth (HB) - see diagram <table border="1"> <thead> <tr> <th>Hand Breadth</th> <th>Suggested Size</th> </tr> </thead> <tbody> <tr> <td>57-80 mm</td> <td>Small</td> </tr> <tr> <td>72-97 mm</td> <td>Medium</td> </tr> <tr> <td>85-110 mm</td> <td>Large</td> </tr> </tbody> </table> ▶ Large size typically accommodates a large hand with gloves, excluding thick or freezer gloves. ▶ NOTE: Hand Wrap is identical to RS5100 Hand Wrap for Enterprise Hand Mount and can be freely interchanged (i.e. SG-WEAR-HNWPRL-01 is the same as SG-RS51-HNWPRL-01)  	Hand Breadth	Suggested Size	57-80 mm	Small	72-97 mm	Medium	85-110 mm	Large	
Hand Breadth	Suggested Size											
57-80 mm	Small											
72-97 mm	Medium											
85-110 mm	Large											

Soft Goods - Wrist Configuration



Part Number	Picture	Description	Notes	Required Items
SG-WS5X-SHLWR-01		Replacement Shell - Wrist	<ul style="list-style-type: none"> ▶ This Shell is included on all Wrist mount configurations. ▶ Has 4 side input buttons 	
SG-WS5X-WSTMT-01		Replacement Wrist Mount	<ul style="list-style-type: none"> ▶ This Mount is included with all Wrist mount configurations. ▶ Does not include Wrist Strap 	<ul style="list-style-type: none"> ▶ Wrist Strap (SG-WS5X-WSTRP-01 or SG-WS5X-WSTRS-01)
SG-WS5X-WSTRP-01		Wrist Strap - Standard size	<ul style="list-style-type: none"> ▶ Length of strap is about 10.25" (26 cm) 	
SG-WS5X-WSTRS-01		Wrist Strap - Small size	<ul style="list-style-type: none"> ▶ Smaller strap accommodates users with smaller wrists. ▶ Length of strap is about 7.8" (20 cm) 	

Soft Goods - RFID - Finger Mount Configuration



Provides upward UHF reading via the integrated antenna in the WS50's built-in rear mounted RFID module

Part Number	Picture	Description	Notes	Required Items
SG-WS5X-SHLRS-01		Replacement Shell - RFID	<ul style="list-style-type: none"> ▶ This Shell is included on all RFID Finger Mount or RFID Back of Hand Mount configurations. ▶ Has 2 side input buttons 	
SG-WS5X-DFLTR-01		Replacement Deflector - RFID	<ul style="list-style-type: none"> ▶ This Deflector is included on all RFID Finger Mount or RFID Back of Hand Mount configurations. ▶ Includes two screws which attach Deflector to Shell. 	

SG-WS5X-TRGA-01		Replacement Finger Trigger - Converged & RFID	<ul style="list-style-type: none"> ▶ Used for replacement of Finger Trigger assembly or converting a Back of the Hand mount configuration to Finger mount configuration. ▶ Trigger can be rotated for use on right or left hand. ▶ Includes stop screw which can be optionally used to prevent removal or rotation of the trigger. 	
SG-WS5X-CMPDR-01		Replacement Comfort Pad for RFID Finger Trigger	<ul style="list-style-type: none"> ▶ Used to replace Comfort Pad on Converged and RFID configuration units. ▶ This pad is included on the Finger Trigger (SG-WS5-TRGA-01). 	
SG-WS5X-STRP-10		Replacement Finger Straps - Converged & RFID (pack of 10)	<ul style="list-style-type: none"> ▶ Used to replace Finger Strap on Converged and RFID configuration units. ▶ This strap is included on the Finger Trigger (SG-WS5-TRGA-01) ▶ Does not include rubber finger perch/bumper used on the Finger Trigger. 	

Soft Goods - RFID - Back of Hand Mount Configuration




Provides upward UHF reading via the integrated antenna in the WS50's built-in rear mounted RFID module and optionally downward UHF reading via the Back of Hand External Antenna

Part Number	Picture	Description	Notes	Required Items
SG-WS5X-SHLRS-01		Replacement Shell - RFID	<ul style="list-style-type: none"> ▶ This Shell is included on all RFID Finger Mount or RFID Back of Hand Mount configurations. ▶ Has 2 side input buttons 	
SG-WS5X-DFLTR-01		Replacement Deflector - RFID	<ul style="list-style-type: none"> ▶ This Deflector is included on all RFID Finger Mount or RFID Back of Hand Mount configurations. ▶ Includes two screws which attach Deflector to Shell. 	

<p>SG-WS5X-BHRS-01</p>		<p>Replacement Back of Hand Mount Adapter - RFID</p>	<ul style="list-style-type: none"> ▶ This adapter is included with all RFID Back of Hand Mount configurations. ▶ Adapter allows WS5X to be worn on the back of hand ▶ Does not include Hand Wrap 	<p>▶ Back of Hand Wrap (SG-WEAR-HNWPxx-01)</p>								
<p>Right Hand wrap SG-WEAR-HNWPRS-01 (Small size)</p> <p>SG-WEAR-HNWPRM-01 (Medium size)</p> <p>SG-WEAR-HNWPRL-01 (Large size)</p> <p>Left Hand wrap SG-WEAR-HNWPLS-01 (Small size)</p> <p>SG-WEAR-HNWPLM-01 (Medium size)</p> <p>SG-WEAR-HNWPLL-01 (Large size)</p>		<p>Hand Wrap for Back of Hand Mount Adapter</p>	<ul style="list-style-type: none"> ▶ Fabric hand wrap. ▶ Color of stitching on Hand Wrap indicates size: White = Small Black = Medium Blue = Large ▶ For suggested sizing measure user's Hand Breadth (HB) - see diagram <table border="1" data-bbox="878 989 1195 1083"> <thead> <tr> <th>Hand Breadth</th> <th>Suggested Size</th> </tr> </thead> <tbody> <tr> <td>57-80 mm</td> <td>Small</td> </tr> <tr> <td>72-97 mm</td> <td>Medium</td> </tr> <tr> <td>85-110 mm</td> <td>Large</td> </tr> </tbody> </table> <p>Large size typically accommodates a large hand with gloves, excluding thick or freezer gloves.</p> <p>▶ NOTE: Hand Wrap is identical to RS5100 Hand Wrap for Enterprise Hand Mount and can be freely interchanged (i.e. SG-WEAR-HNWPRL-01 is the same as SG-RS51-HNWPRL-01)</p>	Hand Breadth	Suggested Size	57-80 mm	Small	72-97 mm	Medium	85-110 mm	Large	
Hand Breadth	Suggested Size											
57-80 mm	Small											
72-97 mm	Medium											
85-110 mm	Large											

<p>Right Arm mount SG-WS5X-BHAHRS-01 (Small size)</p> <p>SG-WS5X-BHAHRL-01 (Large size)</p> <p>Left Arm mount SG-WS5X-BHAHLS-01 (Small size)</p> <p>SG-WS5X-BHAHLL-01 (Large size)</p>		<p>Back of Hand External Antenna Holder</p>	<ul style="list-style-type: none"> ▶ Allows External Antenna to be used for downward facing UHF RFID tag reading. ▶ Holder's stitching color identifies size: <ul style="list-style-type: none"> - White = Small (320mm, approx 12.5") - Blue = Large (370mm, approx 14.5") 	<ul style="list-style-type: none"> ▶ Back of Hand External Antenna Cable (CBL-WS5X-ANTRxxx-01)
--	---	---	--	---

<p>CBL-WS5X-ANTR9L-01 (for use in all regions except EMEA, 900 Mhz)</p> <p>CBL-WS5X-ANTR8L-01 (for use in EMEA, 800 Mhz)</p>		<p>Back of Hand External Antenna Cable</p>	<ul style="list-style-type: none"> ▶ Allows External Antenna to be used for downward facing UHF RFID tag reading. ▶ Antenna cables area also compatible with RFID Wrist Right hand configurations. 	<ul style="list-style-type: none"> ▶ Back of Hand External Antenna Holder (SG-WS5X-BHAHxx-01)
--	--	--	--	--

Soft Goods - RFID Wrist Configuration




Provides upward UHF reading via the integrated antenna in the WS50's built-in rear mounted RFID module and optionally downward UHF reading via the External Antenna

Part Number	Picture	Description	Notes	Required Items
SG-WS5X-SHLRS-01		Replacement Shell - RFID	<ul style="list-style-type: none"> ▶ This Shell is included on all RFID Finger Mount or RFID Back of Hand Mount configurations. ▶ Has 2 side input buttons 	
SG-WS5X-DFLTR-01		Replacement Deflector - RFID	<ul style="list-style-type: none"> ▶ This Deflector is included on all RFID Finger Mount or RFID Back of Hand Mount configurations. ▶ Includes two screws which attach Deflector to Shell. 	

<p>SG-WS5X-WSPLRS-01</p>		<p>Replacement Wrist Mount Plate - RFID</p>	<ul style="list-style-type: none"> ▶ This adapter is included with all RFID Wrist Mount configurations. ▶ Adapter allows WS5X RFID to be worn on the wrist. ▶ Does not include Wrist Mount 	<ul style="list-style-type: none"> ▶ RFID Wrist Mount (SG-WMTRRS-01)
<p>Right Arm mount SG-WS5X-WMTRRS-01 (Small size)</p> <p>SG-WS5X-WMTRRL-01 (Large size)</p> <p>Left Arm mount SG-WS5X-WMTRLS-01 (Small size)</p> <p>SG-WS5X-WMTRLL-01 (Large size)</p>		<p>Wrist Mount</p> 	<ul style="list-style-type: none"> ▶ Uses BOA dial-to-fit design which is strong, durable, and easy to use. ▶ Velcro free design uses non-absorbent materials that can be wiped down. ▶ Includes pouch for optional downward facing External Antenna Cable. ▶ Dial and accent color on strap identifies size: <ul style="list-style-type: none"> - White = Small (338 mm, approx 13.3") - Black = Large (414mm, approx 16.3") 	
<p>Right Arm mount CBL-WS5X-ANTR9L-01 (for use in all regions except EMEA, 900 Mhz)</p> <p>CBL-WS5X-ANTR8L-01 (for use in EMEA, 800 Mhz)</p> <p>Left Arm mount CBL-WS5X-ANTR9S-01 (for use in all regions except EMEA, 900 Mhz)</p> <p>CBL-WS5X-ANTR8S-01 (for use in EMEA, 800 Mhz)</p>		<p>Back of Hand External Antenna Cable</p>	<ul style="list-style-type: none"> ▶ Allows External Antenna to be used for downward facing UHF RFID tag reading. ▶ Right hand antenna configurations are also compatible with RFID Back of Hand configurations. 	

Soft Goods - Common

Part Number	Picture	Description	Notes	Required Items
<p>SG-WS5X-SCRNP1-01</p>		<p>Replacement Screen Protector</p>	<ul style="list-style-type: none"> ▶ Will replace the protector which is typically included with each WS50 unit. ▶ Single screen protector ▶ Plastic material 	

Power Cords/Power Supplies

Part Number	Picture	Description	Notes	Required Items
-------------	---------	-------------	-------	----------------

CBL-DC-388A1-01		DC Power Cord	<ul style="list-style-type: none"> ▶ Used along with Power Supply PWR-BGA12V50W0WW to power Single Slot Cradle and 4-Slot Battery Charger. ▶ Cable length is 1.8 meters 	
PWR-BGA12V50W0WW		Power Supply	<ul style="list-style-type: none"> ▶ Used to power Single Slot Cradle and 4-Slot Battery Charger. ▶ 100-240 VAC, 12V, 4.16A, 50W ▶ Provides US DOE Level VI compliance for power efficiency. 	<ul style="list-style-type: none"> ▶ DC Line Cord (CBL-DC-388A1-01) ▶ AC Line Cord (23844-00-00F or country specific version)
KIT-PWR-12V50W		Power Supply Kit	<ul style="list-style-type: none"> ▶ Includes Power Supply (PWR-BGA12V50W0WW) and DC Line Cord (CBL-DC-388A1-01) 	<ul style="list-style-type: none"> ▶ AC Line Cord (23844-00-00F or country specific version)
CBL-DC-381A1-01		DC Power Cord	<ul style="list-style-type: none"> ▶ Used with Power Supply PWR-BGA12V108W0WW to power 5-Slot, 10-Slot, 20-Slot Cradles 	
CBL-DC-382A1-01		DC Power Cord	<ul style="list-style-type: none"> ▶ Used with Power Supply PWR-BGA12V108W0WW to power 5-Slot, 10-Slot, 20-Slot Cradles ▶ This cable includes a black extension release latch/clip that is needed when powering legacy non-ShareCradle design multi-slot cradles. This cable can be used instead of CBL-DC-381A1-01, if needed. ▶ CBL-DC-381A1-01 is the preferred cable to use. 	
PWR-BGA12V108W0WW		Power Supply	<ul style="list-style-type: none"> ▶ Used to power 5-Slot, 10-Slot, 20-Slot Cradles ▶ 100-240 VAC, 12V, 9A, 108W ▶ Provides US DOE Level VI compliance for power efficiency. ▶ Replaces PWRS-14000-241R 	<ul style="list-style-type: none"> ▶ DC Line Cord (CBL-DC-381A1-01) ▶ AC Line Cord (23844-00-00F or country specific version)
23844-00-00R		AC Line Cord	<ul style="list-style-type: none"> ▶ This AC Line Cord is for use in North America. See the AC Line Cords by Country TAG for comparable line cords to use in other countries. 	
PWR-WUA5V12W0US (US plug style) PWR-WUA5V12W0GB (UK plug style) PWR-WUA5V12W0EU (EU plug style) PWR-WUA5V12W0AU (Australia plug style) PWR-WUA5V12W0CN (China plug style) PWR-WUA5V12W0IN (India plug style) PWR-WUA5V12W0KR (Korea plug style) PWR-WUA5V12W0BR (Brazil plug style) PWR-WUA5V12W0LA (Argentina/Chile/Mexico plug styles)		USB Power Supply for WS50	<ul style="list-style-type: none"> ▶ Used with WS50 Snap-on USB/Charge Cable (CBL-WS5X-USB1-02 or CBL-WS5X-USB1-01) to provide a lower cost charging solution than using a Cradle. ▶ Provides higher current (2.5A) for faster charging ▶ 100-240 VAC, 5 V, 2.5 A 	<ul style="list-style-type: none"> ▶ WS50 Snap-on USB/Charge Cable (CBL-WS5X-USB1-02 or CBL-WS5X-USB1-01) <p><u>When using CBL-WS5X-USB1-02:</u></p> <ul style="list-style-type: none"> ▶ micro-USB Cable (25-124330-01R) or similar cable <p><u>When using CBL-WS5X-USB1-01:</u></p> <ul style="list-style-type: none"> ▶ USB-C Cable (CBL-TC5X-USBC2A-01) or similar cable

Batteries				
Part Number	Picture	Description	Notes	Required Items
BTRY-WS5X-13MA-01		Spare Battery with PowerPrecision - Converged (1300 mAh) 	<ul style="list-style-type: none"> ▶ Designed, manufactured & tested to meet rigorous controls & standards ▶ Premium-grade cells with higher capacity & longer life cycle ▶ Designed to help prevent overcharging & electrical shock ▶ Strong & robust housing for optimal performance & durability ▶ Information available: <ul style="list-style-type: none"> - Available charge status - Total charge accumulated on the battery - Basic state of health 	
BTRY-WS5X-8MA-01		Spare Battery with PowerPrecision - Wrist (800 mAh) 	<ul style="list-style-type: none"> ▶ Designed, manufactured & tested to meet rigorous controls & standards ▶ Premium-grade cells with higher capacity & longer life cycle ▶ Designed to help prevent overcharging & electrical shock ▶ Strong & robust housing for optimal performance & durability ▶ Information available: <ul style="list-style-type: none"> - Available charge status - Total charge accumulated on the battery - Basic state of health 	